

ELECTROPUMPS

HARE

TO.ME.S. DIESEL

SINCE 1977 Made in Italy ISO 9001:2008

Self-priming vanes Electric pumps, powered by asynchronous AC motor. High quality light materials Pump body construction, iron inside, shaft guided and at low engine rpm ensure long-lasting performance. Equipped with TO.ME.S. exclusive fluid transfer optimization system which increases efficiency and performance while reduces decibels.



Fast Trasfer

2800 RPM

Long Life

1400 RPM




ALUMINIUM



IRON INSIDE



BLEEDER VALVE




ANTI-FLOODING




DIMENSION
(mm)



SUCTION



PERFORMANCE

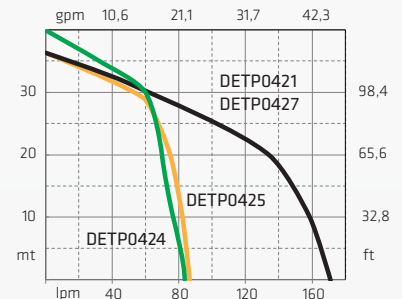

name	flow rate		volts	hp	watt	amperè max	RPM	IN	OUT	weight		packing		code
	LPM	GPM								kg	lbs	cm	inch	
HARE	82	21,7	230 50Hz	1,2	895	7,2	1400	1" F BSP	1" F BSP	16,0	35,3	46 x 27 x 36	18,1x10,6x14,2	DETP0425
	74	19,5	400 50Hz	1	746	2,5	1400	1" F BSP	1" F BSP	13,4	29,5	46 x 27 x 36	18,1x10,6x14,2	DETP0424
	159	42	230 50Hz	2	1491	10,2	2800	1" F BSP	1" F BSP	17,0	37,5	46 x 27 x 36	18,1x10,6x14,2	DETP0421
	159	42	400 50Hz	1,5	1119	3,2	2800	1" F BSP	1" F BSP	15,3	33,7	46 x 27 x 36	18,1x10,6x14,2	DETP0427

also for NPT