PIUSI 3000 SUPREME

READY FOR A NEW GENERATION OF REFUELLING PUMPS?

THE PROBLEMS TYPICALLY ASSOCIATED WITH REFUELLING FROM TRANSPORTABLE TANKS

- 1. **Security:** is the pump operated by a simple ON button, making it susceptible to unauthorised fuel withdrawals?
- 2. Unknown withdrawals: are you in doubt about who has withdrawn fuel and when?
- 3. Overheating: does the pump overheat when dispensing fuel to vehicles with large fuel tanks?
- 4. **Failures or malfunctions:** has the pump suffered damage as a result of being connected to the wrong voltage?

PIUSI 3000 SUPREME IS THE SOLUTION!

- Dedicated app Secure, controlled and traceable fuel access, only to authorised users in possession of a security PIN
- 2. **Flow Control Technology -** Automatically reduces the flow rate in the event of overheating. You can also reduce the flow rate manually, from an app, if you want to dispense fuel into small cans
- 3. **Multi-Battery Technology -** Multi-voltage power supply from 12V to 24V*, with protection in the event of connection with reversed polarity

^{*} The Piusi 3000 Supreme does not have the ability to monitor the battery and does not provide any type of protection for it.






3 VERSIONS COVERING A FULL RANGE OF NEEDS

	SITE DIMENSIONS										
	7 1	pump	2 or more pumps								
	PIUSI SUPREME	PIUSI SUPREME PRO	⊘B. SMART								
Integrated flow control	✓	✓	✓								
Login with security PIN	✓	✓	✓								
Delivery time-out	✓	✓	✓								
Preset function	✓	✓	✓								
User Management	Up to 2 users	Up to 10 users	Up to 500 users for each dispenser, unlimited in the system								
Dispense history	Last 20	Latest 100, downloadable with CSV file	Filterable report by date								
Dispense calendar	-	in the app	in the webapp with filterable report by date								
Total dispensed	-	in the last 30 days	✓ Filterable report by date								
In-app reminder/To do list	-	✓	-								
Level indicator managemehnt	-	-	✓ with the TANK WATCHDOG add-on								
Consumption management of vehicles and users	-	-	with the FUEL ECONOMY add-on								
Geolocation of dispenses	-	-	✓ with the MAPLY add-on								

It is possible to upgrade to the higher version even after purchasing the pumph

SOFTWARE UPGRADE (ONE TIME FEE)

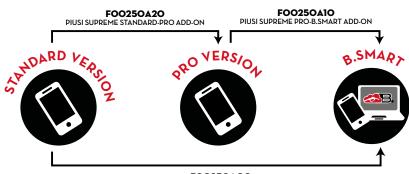

FOO250A00PIUSI SUPREME STANDARD-B.SMART ADD-ON

ALREADY IN B.SMART?

Buy a Discovery B.SMART ADD-ON for each PIUSI 3000 SUPREME and add it to your site code.



FOO770S00
PIUSI SUPREME DISCOVERY B.SMART
+10 DRIVERS INCLUDED









PIUSI 3000 SUPREME

FEATURES

- VOLTAGE FROM 12 TO 24V*
- BLUETOOTH CONNECTION
- TOTAL CONTROL VIA APP
- VIBRATION RESISTANCE
- · LOW NOISE
- COMPATIBLE WITH DIESEL UP TO B2O HVO/XTL
- MAX. PRESSURE 1,5 BAR
- · IP55

The **PIUSI 3000 SUPREME** is a highly innovative device designed to offer full pump control and management from a smartphone app, thus helping users fill up with diesel from mobile tanks quickly and safely.

The PIUSI 3000 SUPREME combines new digital technologies with PIUSI's long and proven track-record in the design of fluid management systems such as pumps and flow meters. This new pump is designed to dispense diesel, measure the volume dispensed, manage operator access and solve the problems typically faced by users of transportable tanks.

PERFORMANCE

50 L/MIN

FLOW RATE

CONTINUOUS DUTY FROM
12V TO 24V*

VOLTAGE

±0,5%

ACCURACY

* The Piusi 3000 Supreme does not have the ability to monitor the battery and does not provide any type of protection for it.





PACKAGING											
	WE	GHT	PACKAGING								
CODE	KG	LBS	ММ	INCH	PCS/BOX						
F00250H00	8	17,6	270X190X180	-	1						
F00250V00	8	17,6	270X190X180	-	1						
F00250D00	8	17,6	300X300X180	-	1						
F00250K00	15	33	490X390X310	-	1						
F00250D10	15	33	490X390X310	-	1						













TANK MONITORING

HOSE REEL

ACCESSORIES

MERCHANDISE



























ANY BIODIESEL

ANTIFREEZE

AdBlue®







GREASE KEROSENE





WINDSCREEN




DIMENSIONS

BASE BRACKET KIT







IN THE BOX

- PUMPS
- SUCTION FILTER (BASE BRACKET KIT)
- DELIVERY HOSE
- AUTOMATIC NOZZLE A60
- · ELECTRIC CABLE 4M
- · OIL & FUEL FILTER (2" DIRECT MOUNT)
- 2" SUCTION CONNECTION (2" DIRECT MOUNT KIT)
- · BASE BRACKET (BASE BRACKET KIT)
- · NOZZLE HOLDER (2" DIRECT MOUNT KIT)
- · ACCESS KEY (1PZ)
- · INSTRUCTION MANUAL

DETAILS










COMPONENTS


- · BODY: CAST IRON
- ROTOR: SINTERED STEEL
- · VANES: ACETAL RESIN
- SEAL: NBR
- · SHAFT: STEEL

ACCESSORIES

- AUTOMATIC NOZZLE A60 + HOOK COD. FOO6O3SOO (2" DIRECT MOUNT KIT)
- · AUTOMATIC NOZZLE A60 COD. FO0603060 (BASE BRACKET KIT)
- DIESEL HOSE 4M (COD. F24103000)

2" DIRECT MOUNT KIT





Dimensions expressed in millimeters

TECHNICAL DATA														
CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			DUTY	FUSES CAPACITY	HOSE		SPIN ON		
			L/MIN	GPM	DC VOLT	POWER WATT	AMP. MAX.	RPM	CYCLE CONTINUOUS	AMPERE	LENG.	Ø	FILTER	NOZZLE
F00250H00	PIUSI 3000 SUPREME PUMP ONLY B.O.	D	50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-	-	-
F00250V00	PIUSI 3000 SUPREME PUMP ONLY B.V.	D	50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-	-	-
F00250D00	PIUSI 3000 SUPREME PUMP ONLY DRUM	D	50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	-	-	YES	-
F00250K00	PIUSI 3000 SUPREME BASE BRACKET KIT	D	50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	4MT	3/4"	-	A60
F00250D10	PIUSI 3000 SUPREME 2" DIRECT MOUNBT KIT	D	50	13	FROM 12 TO 24	200W	16A/8A	2700	YES	25A	4MT	3/4"	YES	A60