

ANTIFREEZE

BIO DIESEL

DIESEL

FOOD

GASOLINE

GREASE

KEROSENE

OIL

AdBlue®

WATER

WINDSCREEN

A AUTOMATIC NOZZLES

60 - A80 - A120 - A280

EN. Automatic nozzles. These nozzles are fitted with a device that automatically shuts off flow when the tank is full. Complete with swivel connector they conform to the strictest safety requirements and bear all necessary certifications.

ZH. 自动加油枪。具有油箱加满时自动跳枪停止功能。配备符合最严格安全标准的旋转接头并带备一切许可证书。

PT. Pistolas automáticas. São equipadas com um dispositivo de paragem automática do fluxo quando o depósito encher-se. Equipadas com união giratória atendem aos mais severos requisitos de segurança e receberam as certificações necessárias.

PERFORMANCE

Flow rate up to 280 l/min

- 流量达280公升/分钟

Caudal até 280 l/min

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight	
	kg	lbs
F00603060	1.25	2,76
F00602020	1.20	2,65
F00604030	1.93	4,25
F00610020	1.93	4,25
F13249000	3.3	7,28
F00613A00	1.30	2,87
F00614000	1.65	3,64
F00602030	1,25	2,76
F0061903B	2,60	5,73
F00613020	1,25	2,76



NOZZLE

Flow-rate
up to
280 l/min
(up to 74 gpm)




A60



A80



A120

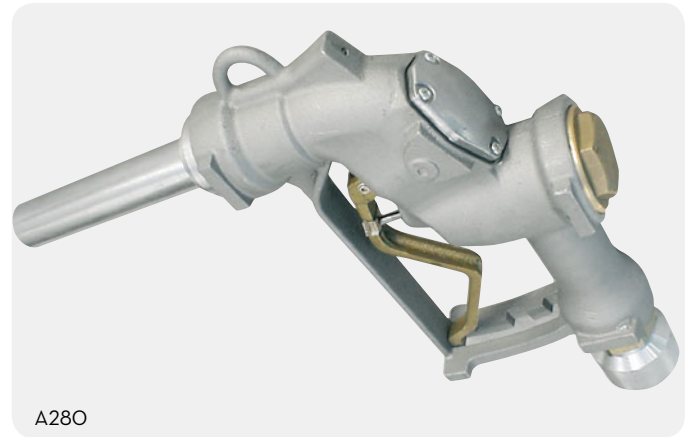


A280

FEATURES



Automatic stop



High flow rate



Swivel

ON REQUEST



Rapsoil version



Urea version



Automatic nozzle

Code F00613020

PRODUCTS' RANGE TECHNICAL DATA

Code without swivel	Code with swivel	Description	Fluid type	Flow-rate		Inlet		Spout ext. Ø mm
				l/min	gpm	without swivel BSP	with swivel BSP	
F12127000	F00603060	A60	DG	70	19	F 3/4"	F 1"	24
F1244200A	F00602020	A60 Unleaded	DG	60	16	F 3/4"	F 1"	20
F12449000	F00604030	A80	DG	90	24	F 1"	F 1"	29
F12128000	F00610020	A120	DG	120	32	F 1"	F 1"	29
-	F13249000	A280	DG	280	74	-	1 1/2"	38,5
-	F00613A00	A60 - EN 13012	D	70	19	F 3/4"	F 1"	24
-	F00614000	A120 - EN 13012	D	120	32	-	F 1"	29
F00602040	F00602030	Autom. Nozzle RAPSOIL	B	60	16	F 3/4"	F 1"	24
-	F0061903B	Autom. Nozzle AdBlue® (inox)	WU	40	11	-	F 3/4"	19
-	F00613020	Autom. Nozzle ATEX	DGK	60	16	-	F 1"	20