

## 60 L SPRAY CADDY PG 8

### 60 L spray caddy for liquid de-icing products

- electric pump 12 V, approx. 6 l/min
- LiFePO<sub>4</sub> battery with charger
- flow-activated pump
- 8 m spiral hose
- spray lance with flat jet nozzle
- suitable for commercially available liquid, water-based de-icing products



Spiral hose, electric pump and battery with charger




Description	Capacity L	Dimensions cm (l x w x h)	Weight approx. kg	Order no.
Spray Caddy	60	90 x 52 x 37	15	10863


## GRIT SPREADER PG 8

### Grit spreader SW 130 with PE hopper

- for commercial and domestic use
- suitable for different gritting materials and spreading widths
- quick and easy assembly
- robust construction

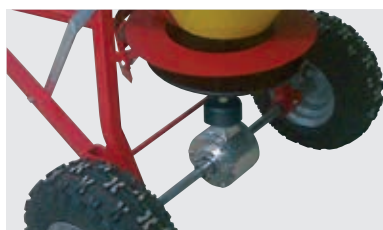

Rugged transmission with aluminum housing

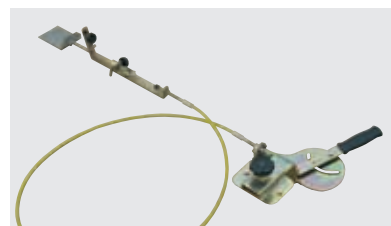

Accessory remote control





Disengageable gear



SW 130

Description	Capacity L	Spreading width in m	Spreading steps	Weight approx. kg	Order no.
SW 130 for large spreading areas, with robust gearbox and aluminium housing, yellow plastic hopper with robust flap lid, painted tubular steel frame, pneumatic rubber tyres, volume regulator. Supplied as pre-assembled modules. Drawbar parallel adjustable for height included. Gearing disengageable. Max. speed 6 km/h.	130	up to 5	10	39	10063

### ACCESSORIES

Description	Order no.		
 Spreading width limiter for SW 130	7291		
 Drawbar with ball coupling for SW 130	8621		
Description	Length from operating lever m	Weight approx. kg	Order no.
Remote control for spreader SW 130	2.0	3.0	8289

## TOWABLE GRIT SPREADERS PG 8

### Towable spreader SW 200 and SW 300 with PE hopper

- for commercial and domestic use
- suitable for different gritting materials and spreading widths
- robust construction
- gearbox with aluminium housing, can be disabled
- sturdy, greasable wheel bearings
- stainless steel frame
- all parts that come into contact with the media are stainless steel or plastic
- spreading amount, spreading direction and spreading width can all be set as required (optional)
- 16 x 6.5 wheels with pneumatic rubber tyres, winter profile
- parallel height-adjustable drawbar
- lighting with 7-pin plug
- supplied as pre-assembled modules



SW 200




Additional anti-compression



Spreading quantity control



Disengageable gear

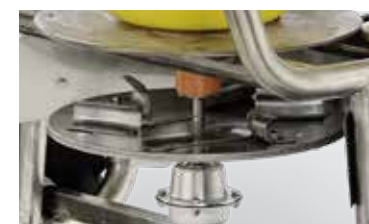

stainless steel spreader disc, adjustable







robust wheel bearing



SW 300

Description	Capacity L	Spreading width in m	Spreading steps	Weight approx. kg	Order no.
SW 200 for large spreading areas	200	up to 5	10	80	10205
SW 300 for large spreading areas	300	up to 5	10	85	10206

### ACCESSORIES

Description	Order no.
 Spreading width limiter adjustable, galvanised, for SW 200 and SW 300	10207
 Remote control for spreaders SW 200 and SW 300 length of bowden cable: 2.0 m	10208
 Cover for SW 200 and SW 300	10210
 Ball coupling 2", galvanised, for SW 200 and SW 300	10209