

RETENTION BASINS TYPE AM / AO



Type AM-2



Type AO-4/A



Type AM-4/B

Storage of max. 4 x 200 litre drums, also combined with 60 litre drums and small cans

- construction made of 3 mm steel sheeting
- 100 mm ground leeway
- conical construction
- can be stacked in one another
- strengthened by reinforced edging on both sides
- for use with a pallet truck or forklift truck

Types available

Type AM

- with galvanized grid (load capacity 1000 kg/m²)

Type AO

- without grid

Accessories (please refer to page 107)

- drum supports type FA, galvanized
- clip-on rotating supports type RA for rotating the drums, galvanized
- can shelves type GR, galvanized

Type	Max. no. of (200 litre drum)	Dimensions in mm (l x w x h)	Retention capacity in l	Weight painted in kg
AM-1	1	800 x 800 x 545	241	66
AM-2	2	1200 x 800 x 415	263	76
AM-4/A	4	1200 x 1200 x 335	304	99
AM-4/B	4	2400 x 800 x 285	312	122
AO-1	-	800 x 800 x 545	242	52
AO-2	-	1200 x 800 x 415	265	56
AO-4/A	-	1200 x 1200 x 335	309	65
AO-4/B	-	2400 x 800 x 285	318	82

Finish:

RAL 2000

RAL 3000


RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized

RETENTION BASINS TYPE ECO-S

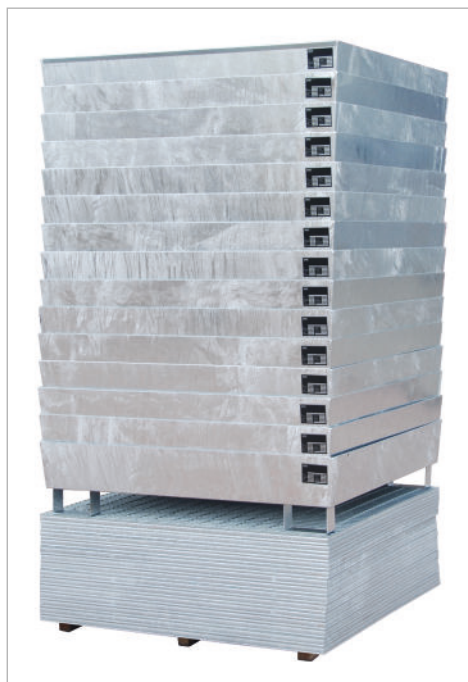

Type ECO-S 4/200 - shipping unit



Type ECO-S 2/200

U



- certified manufacturer EN ISO 9001
- manufacturing processes under TÜV surveillance
- every unit tested for leakage
- flammable liquids of the GHS-categories 1-3
- water pollution liquids of the GHS-categories 1-4

The conical retention basin optimized for logistics - for the storage of max. 4 drums of 200 l, also combined with 60 litre drums and small cans

- construction made of 2 mm steel sheeting
- 100 mm ground leeway
- galvanized grid (load capacity 650 kg/m²)
- conical construction
- can be stacked
- for use with a pallet truck or forklift truck
- shipping unit: 15 units on a europallet

Accessories: please refer to page 107

Type	Max. no. of (200 litre drum)	Dimensions in mm (l x w x h)	Retention capacity in l	Weight galvanized in kg
ECO-S 2/200	2	1200 x 800 x 360	232	48
ECO-S 4/200	4	1200 x 1200 x 280	240	70
ECO-S 4/400	4	1200 x 1200 x 430	440	80

Finish:

hot-dip galvanized